

2. REMOVAL AND INSTALLATION OF FRONT DOOR ASSEMBLY

FRONT DOOR TRIM (Driver Side)

※ **Preceding Work:** Disconnect the negative battery cable.

- Removal of fastener cover



1. Unscrew seven mounting screws from the door trim and separate the fasteners starting from bottom of the door trim to remove it.




Location of Fasteners





2. Remove the door handle cable (A), door courtesy lamp connector (B), door tweeter speaker connector (C) and power window switch connector (D) from the removed door trim.

A. Door handle connector

: Remove the cables from 1 to 4 as in order shown in figure below.

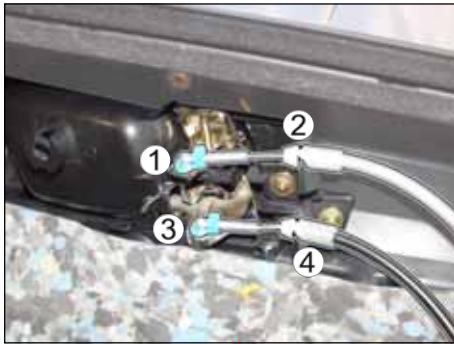

C. Door tweeter speaker connector

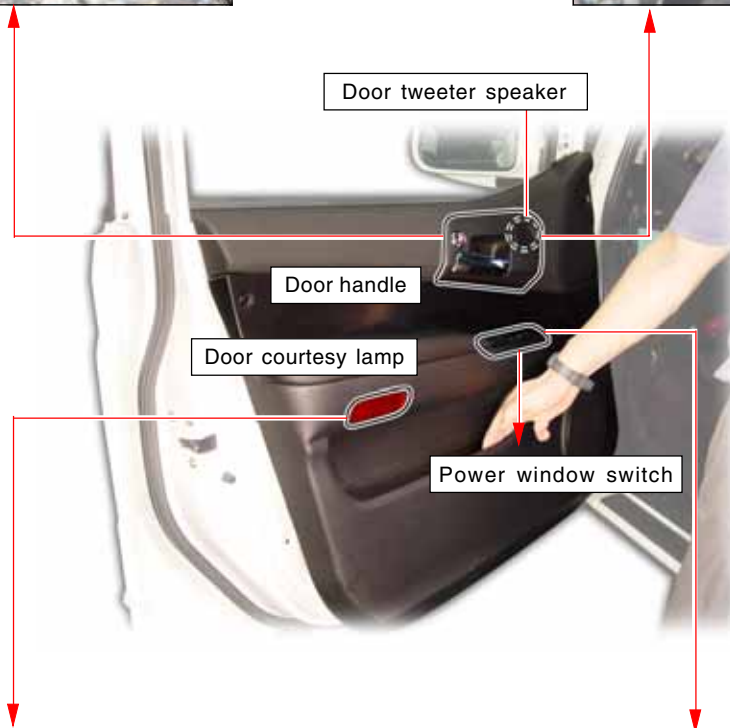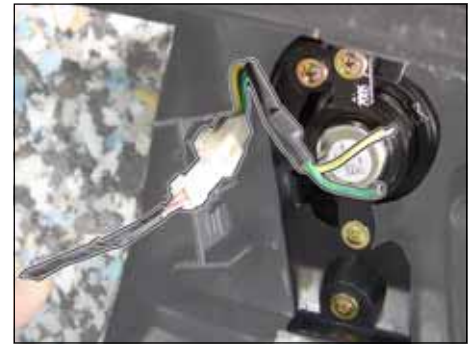

B. Door courtesy lamp connector




D. Power window switch connector




CHANGED BY	
EFFECTIVE DATE	
AFFECTED VIN	

Front Door (Driver Side)

※ **Preceding Work:** Disconnect the negative battery cable.

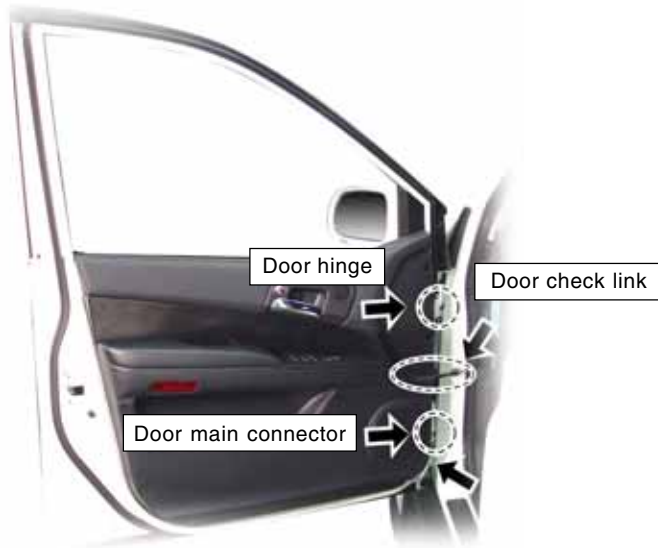

1. Remove the main wiring harness cover and disconnect the door main connector.

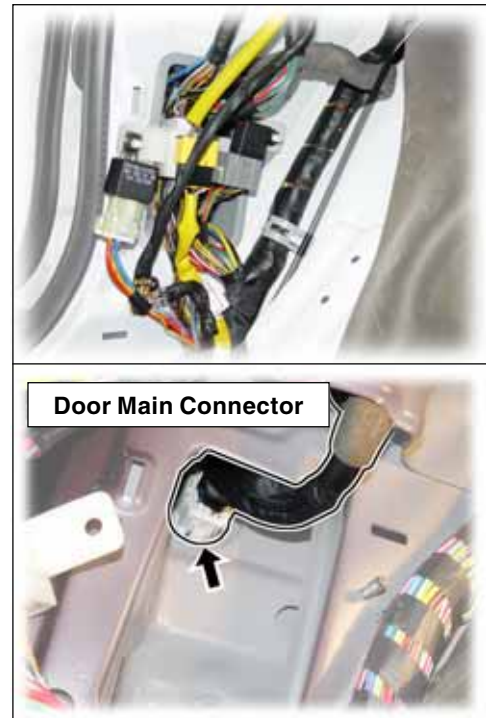

2. Unscrew the mounting bolt from the door check link (vehicle side).



3. Unscrew the upper and lower hinge bolts and remove the door assembly.

